


FLEX PE14-2 150 Polisher 6”
Power Tools



FLEX



Overload Protection	Hook and loop fasteners	Restart Protection
Speed Selection	Spindle-lock	Mains cable
Side handgrip	Temperature Monitoring	Constant Drive Control

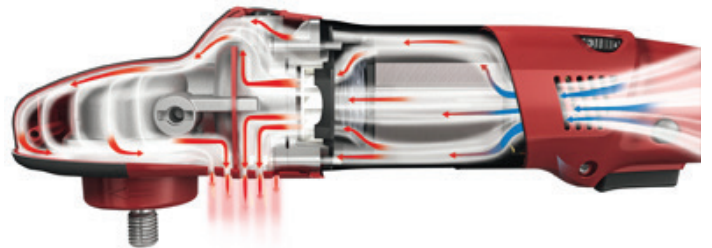

FLEX PE 14-2 150 Polisher 6”

POLISHFLEX variable-speed polisher with a high torque

- Microprocessor electronics: stepless speed selection, tachogenerator-controlled constant speed, overload protection, re-start protection and temperature monitoring
- Powerful 1400 watt motor with highly-efficient ventilator for optimum cooling
- Continuous speed control trigger: for a gentle start (starting speed at setting 1 (380 rpm)) and a lock-on for continuous operation
- Optimised air flow for optimum cooling of motor and gear. No annoying exhaust air for the user
- Innovative combination of planetary and angular gears reduces noise to an absolute minimum
- Flat gear head reduces distance to the surface. The machine can therefore be operated safely in any position.
- Grip hood: ergonomically shaped with SoftGrip. The machine can be controlled with precision and is always comfortable yet secure to hold.
- Spindle lock: It is ideally positioned to prevent operating error and does not interfere with the grip area.
- With rubberised resting bar for safe setting down
- 4 metres PUR H05-BQF cable: wear-resistant, flexible and highly resistant to cuts and abrasions

Max. polishing pad diameter :.....	8" (200 mm)
Max. back-up pad diameter :.....	6" (150 mm)
No load speed :	380-2100 rpm
Power input :	1400 watt
Power output :	880 watt
Tool fixture :	5/8 - 11
Size (L x H) :	16"x 4,5" (405x117 mm)
Cable length :	157,5" (4,0 m)
Weight :	5Lbs (2,3 kg)

Stock No.
116040